




Shandong Zhongyue Precision Bearing C...

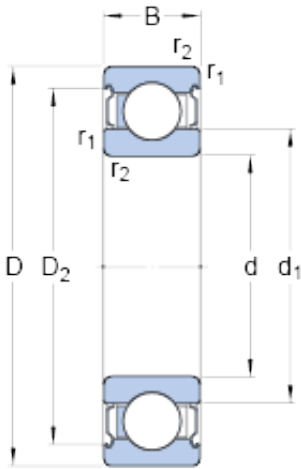

95 mm x 170 mm x 32 mm SKF 6219-2Z/VA228
deep groove ball bearings

Bearing No. 6219-2Z/VA228

6219-2Z/VA228 Bearing 2D drawings and 3D CAD models

Size	170x95x32 mm
Bore Diameter	170 mm
Outer Diameter	95 mm
Width	32 mm
d	95 mm
D	170 mm
B	32 mm
d ₁	118.25 mm
D ₂	151.3 mm
r _{1,2} - min.	2.1 mm
d _a - min.	107 mm
d _a - max.	118 mm
D _a - max.	158 mm
r _a - max.	2 mm
Basic dynamic load rating - C	114 kN
Basic static load rating - C ₀	81.5 kN
Limiting speed	60 r/min
Limiting temperature - T	350 ° C
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0
Product Group	B00308



Shandong Zhongyue Precision Bearing C...

Enclosure	2 Metal Shields
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	Coronet Cage
Cage Material	Graphite
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	95MM Bore; 170MM Outside Diameter; 32MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; Coronet Cage Internal Special Features; C0-Medium Internal Clea
Other Features	Deep Groove Extreme Temperature Variant
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.skf.com
Weight / LBS	2.6
Outside Diameter	6.693 Inch 170 Millimeter
Outer Race Width	1.26 Inch 32 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Bore	3.74 Inch 95 Millimeter
d ₁	118.25 mm
D ₂	151.3 mm
r _{1,2} min.	2.1 mm



Shandong Zhongyue Precision Bearing C...

d_a min.	107 mm
d_a max.	118 mm
D_a max.	158 mm
r_a max.	2 mm
Basic dynamic load rating C	114 kN
Basic static load rating C_0	81.5 kN
Limiting temperature T max.	350 ° C
Mass bearing	2.71 kg